

INV713Z-RTE

2 Megapixel IR Vandal Dome Camera with Motorized Zoom Lens

Infinique offers a wide range of IP based high definition cameras available in various housing formats, including Box, Dome and Bullet. Our cameras are equipped with superior image sensor and digital signal processor to produce sharp, crisp pictures and are enclosed in weather and vandal resistant housings making it suitable for use in all security applications. The ONVIF compliance of the cameras helps in easy integration, providing peace of mind for your investment. From small to very large installations, Infinique's cameras are reliable, future proof and an ideal solution for your video surveillance needs.

The INV713Z-RTE is a 2 Megapixel IP IR Dome Camera built with a vandal resistant aluminum housing, incorporating a 1/3" high quality image sensor and IR LEDs to provide clear crisp images both during the Day and Night.

The camera comes equipped with a 2.8-12mm Varifocal lens with remote zoom and focus for easy setup of field of view. The Auto Iris control allows the camera to automatically set its iris position to maximize image quality in all lighting conditions. The camera streams real-time video at high definition resolution using H.265 or H.264 compression optimizing the bandwidth and increasing storage efficiency.


Built-in PoE for powering the camera and the flexible 3-axis bracket for fixing it on ceiling or wall, provides the convenience for installers to complete the installation quickly and with ease. These excellent IP cameras are highly suitable for video surveillance of government buildings, residential apartments, schools, colleges, universities, shopping malls, hospitals, hotels, industrial parks, and corporate offices.

Product Features

- 1/3" CMOS Sensor
- 2 Megapixel Resolution
- Up to 30fps at 1920 x 1080
- IR Distance 45 meters
- 2.8-12mm Motorized Zoom Lens with DC Auto Iris
- S/N Ratio of more than 50dB
- H.265 and H.264 Compression
- Up to 3 Simultaneous Video Streams
- Micro SD Card Slot for Onboard Storage
- Power Over Ethernet (PoE), IEEE 802.3af
- IP67 Rated Housing
- Wall or Ceiling mount with 3 Axis Bracket
- ONVIF 2.2.0 Compliant



Dimensions

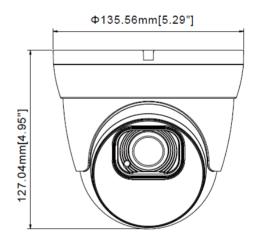

Accessories



INV713Z-RTE



2 Megapixel IR Vandal Dome Camera with Motorized Zoom Lens

IMAGE PERFORMANC	E
Image Sensor	1/3" CMOS
Effective Pixels (H x V)	1280 × 1024
Resolution (Megapixels)	2
Minimum Illumination	0.002 lux (AGC ON) 0 lux with IR ON
Image Rate (FPS)	30
S/N Ratio	More than 50dB
IR Distance (m)	45
LENS	
Focal Length (mm)	2.8-12 Varifocal Motorized Zoom Lens
Iris	DC Auto Iris, Manual
Angle of View (deg)	H:107 (Wide)~35 (Tele), V:54 (Wide)~20 (Tele)
VIDEO AND AUDIO	
Video Compression	H.265 Main Profile; H.264 (Baseline, MP, HP)
Main Stream	1920 x 1080, 1280 x 720
Sub Stream	720 x 576, 640 x 480
Motion Detection	Up to 4 Zones
Electronic Shutter Control	1/5 sec ~ 1/20000 sec
Day/Night Control	Automatic / Manual
Flicker Control	50 Hz, 60 Hz
Digital WDR	Off, Low, Normal, High
White Balance	Automatic / Manual
Backlight Compensation	N/A
Privacy Mask Zones	Up to 4 Privacy Mask Zones
Automatic Gain Control	Auto/Manual, Adjustable Level
Audio Compression	G.711A/ G.711U/ G.726
Audio Input/ Output	Line level input and output, 3.5mm A/V Interface
Video Output	2 pin terminal block
Video Bit rate	256K-8M ,Supports CBR/VBR
OSD	Camera ID, Timestamp, Bitrate
Image Orientation	Image Flip, Mirror, LSC, CTB
Image Controls	Brightness, Contrast, Hue, Saturation, Acu, Gamma
Advanced Functions	Image Rotation, Gain Control, Anti-Fog, Anti-False Color, Anti-Shake, IR Detection
Motion Detection	Up to 4 Zones
LOCAL STORAGE	
Storage Type	Micro SD card, Max up to 256GB
Recording	Video and Image; Auto / Schedule/ Manual / On Event

NETWORK		
Network Port	10/100M BASE-TX, RJ-45 Connector	
Cabling Type	Category 6 and higher	
Network Protocol	IPv4, HTTP, TCP/IP, UDP, RTP, RTSP, RTCP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP	
ONVIF Protocol	ONVIF Compliant Profile-S 2.2.0	
Security	Multiple User Access with password protection	
Users	Maximum 5 users	
PC Web Browser	IE 6.0 Above; Mozilla Firefox; Google Chrome	
Mobile Device	Windows Mobile, Symbian, iPhone, Android	
Events	Motion, Sensor, Network Failure	
Event Handlers	FTP, E-mail, Alarm Out	
MECHANICAL		
Housing ID	V4DIMWH670745A1	
Dimensions (mm)	135 (D) x 127 (H)	
Weight (g)	850	
Housing	Aluminum Die Cast	
Finish	White Powder Coat, RAL 9003	
Installation	Ceiling Mount / Wall Mount, 3-Axis Bracket	
ELECTRICAL		
Power Consumption	708mA, 12V DC, 8.5W	
Power Source	PoE IEEE802.3af; DC12V ±10%; AC 24±10%	
Power Connector	3.5mm Power Jack	
RTC Backup Battery	3V Magnesium Lithium	
ENVIRONMENTAL		
Operating Temperature (C)	-10 to +60	
Storage Temperature	-20 to +60	
Operating Humidity	0% - 95% non condensing	
Ingress Protection Rating	IP67	
Impact Rating	IK07	
STANDARDS COMPLIANCE		
Emissions	FCC Part 15 Subpart B Class B EN 55022:2010 IC ICES-003 Class B	
Immunity	EN 55024:2010	
Safety	UL 609501, EU: 2001/95/EC GPSD	


ORDERING INFORMATION		
PART NUMBER	DESCRIPTION	
INV713Z-RTE	Infinique Premium Series Indoor Outdoor IR Dome Carmera, 2MP, 2.8-12mm Motorized Zoom Lens, IR Array LED, 45m IR Range, H.265, H.264, MJPEG, True Day and Night with ICR, ONVIF Compliant, PoE, IP67, IK07	
IJBBWM-134	Infinique Wall Mount Junction Box, Base Diameter 134 mm	
IJBBCM-134	Infinique Ceiling Mount Junction Box, Base Diameter 134 mm	
IBDLWM-2	Infinique Camera L Bracket, Wall Mount Base Diameter 163 mm	
IBKTCM	Infinique Pendant Mount Ceiling Bracket, 45 (D) x 294 (H) mm	
IBBCPM	Infinique Pole Mount Bracket with Metal Ties, 125 (L) x 46 (W) x 200 (H) mm	
IBCRWM	Infinique Corner Mount Bracket, 200 (L) x 130 (W) x 172.8 (D) mm	



Housing Accessories





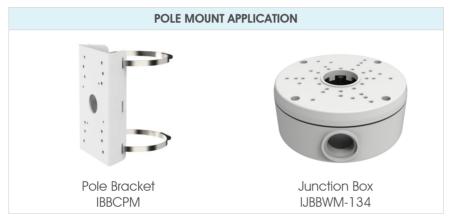









Infinique, a Canadian company is a manufacturer of high performing end-to-end solutions in copper, fiber and video surveillance systems. For more information visit our website at www.infinique.com or email us at sales@infinique.com.